


PERFECT FIT™

NEON FLEX Series LED Light fixtures by Northwest LED


Job Name
Notes

Professional quality, energy efficient waterproof flexible light fixtures. Custom fabricated-without the custom price!


I02-S Side Emitting

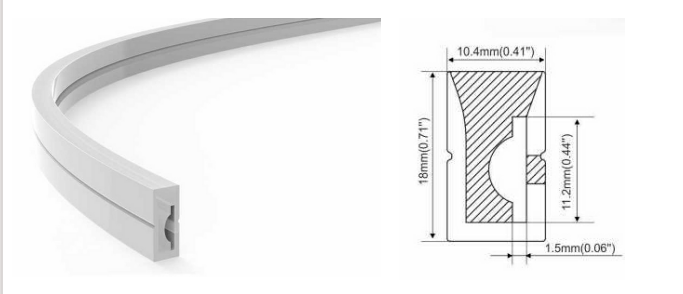

I03-T Top Emitting

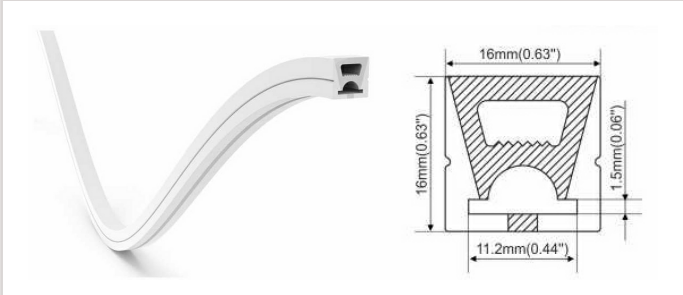

I616-C Corner Emitting

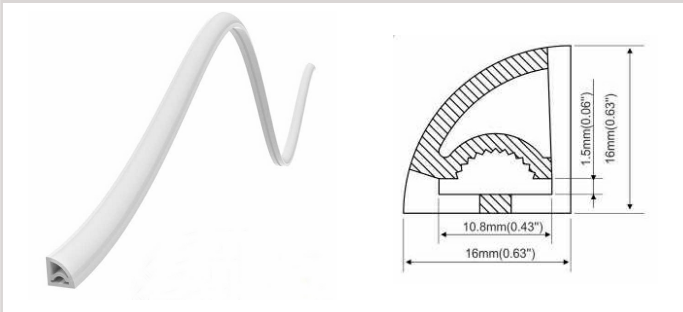

Features

- Uniform lighting with “dot free” output.
- Custom fabricated in the USA in lengths from 4-inches to 16 feet.
- Flexible - create curves with a radius of 2-inches or greater.
- Waterproof IP67 rating for wet locations.
- Dimmable when powered with an approved dimmable driver. (sold separately)
- 2-year warranty when powered with a Northwest LED driver.

Brightness Options	Voltage DC	Watts/ Ft.	LEDs/ Ft.	Lumen/ Ft.
Soft (SO)	12	1.5	18	64
Medium Bright (MB)	12/24	2.9	36	128
Bright (BR)	12	4	18	175
Extra Bright (XB)	12/24	4.4	36	198



Pictured: Model I02-S

LED Color Options	
2400 k	Very Warm White (MB only)
2700 k	Incandescent White
3000 k	Halogen White
4000 k	Natural White
RGB	Color Adjustable

Ordering Information

All NEON FLEX series fixtures are made of flexible & waterproof dual silicone extrusion and come standard with mounting clips. Please specify the fixture style, color temperature, brightness level, and finished length for each fixture. Fixtures may *optionally* be ordered with extra long leads, leads on both ends or interconnected with a short “jumper” to allow fixtures to be mounted around corners.

**Examples: LinF12-103-T-RGB-65-L10
LinF24-1616-C-XB-30k-96**

Model /voltage	Lens	Brightness	Color Temp	Fixture Length In Inches	Options
LinF12-I02-S	f = frosted	SO=Soft XB=Extra Br.	24k=2400k 40k=4000k	4" to 196"	L=lead length (other than 2 foot std.)
LinF12-I03-T		MB=Med Bright	27k=2700k RGB		S=second lead length
LinF12-I616-C		BR=Bright	30k=3000k		I=interconnect
LinF24-I02-S					
LinF24-I03-T	f	MB, XB	24k, 27k, 30k, 40k	4" to 196"	L, S, I
LinF24-I616-C					

Northwest LED